



MISSION BAY SCHOOL PUBLIC ART PROJECT AS INSTALLED

SFAC VISUAL ARTS COMMITTEE

January 21, 2026



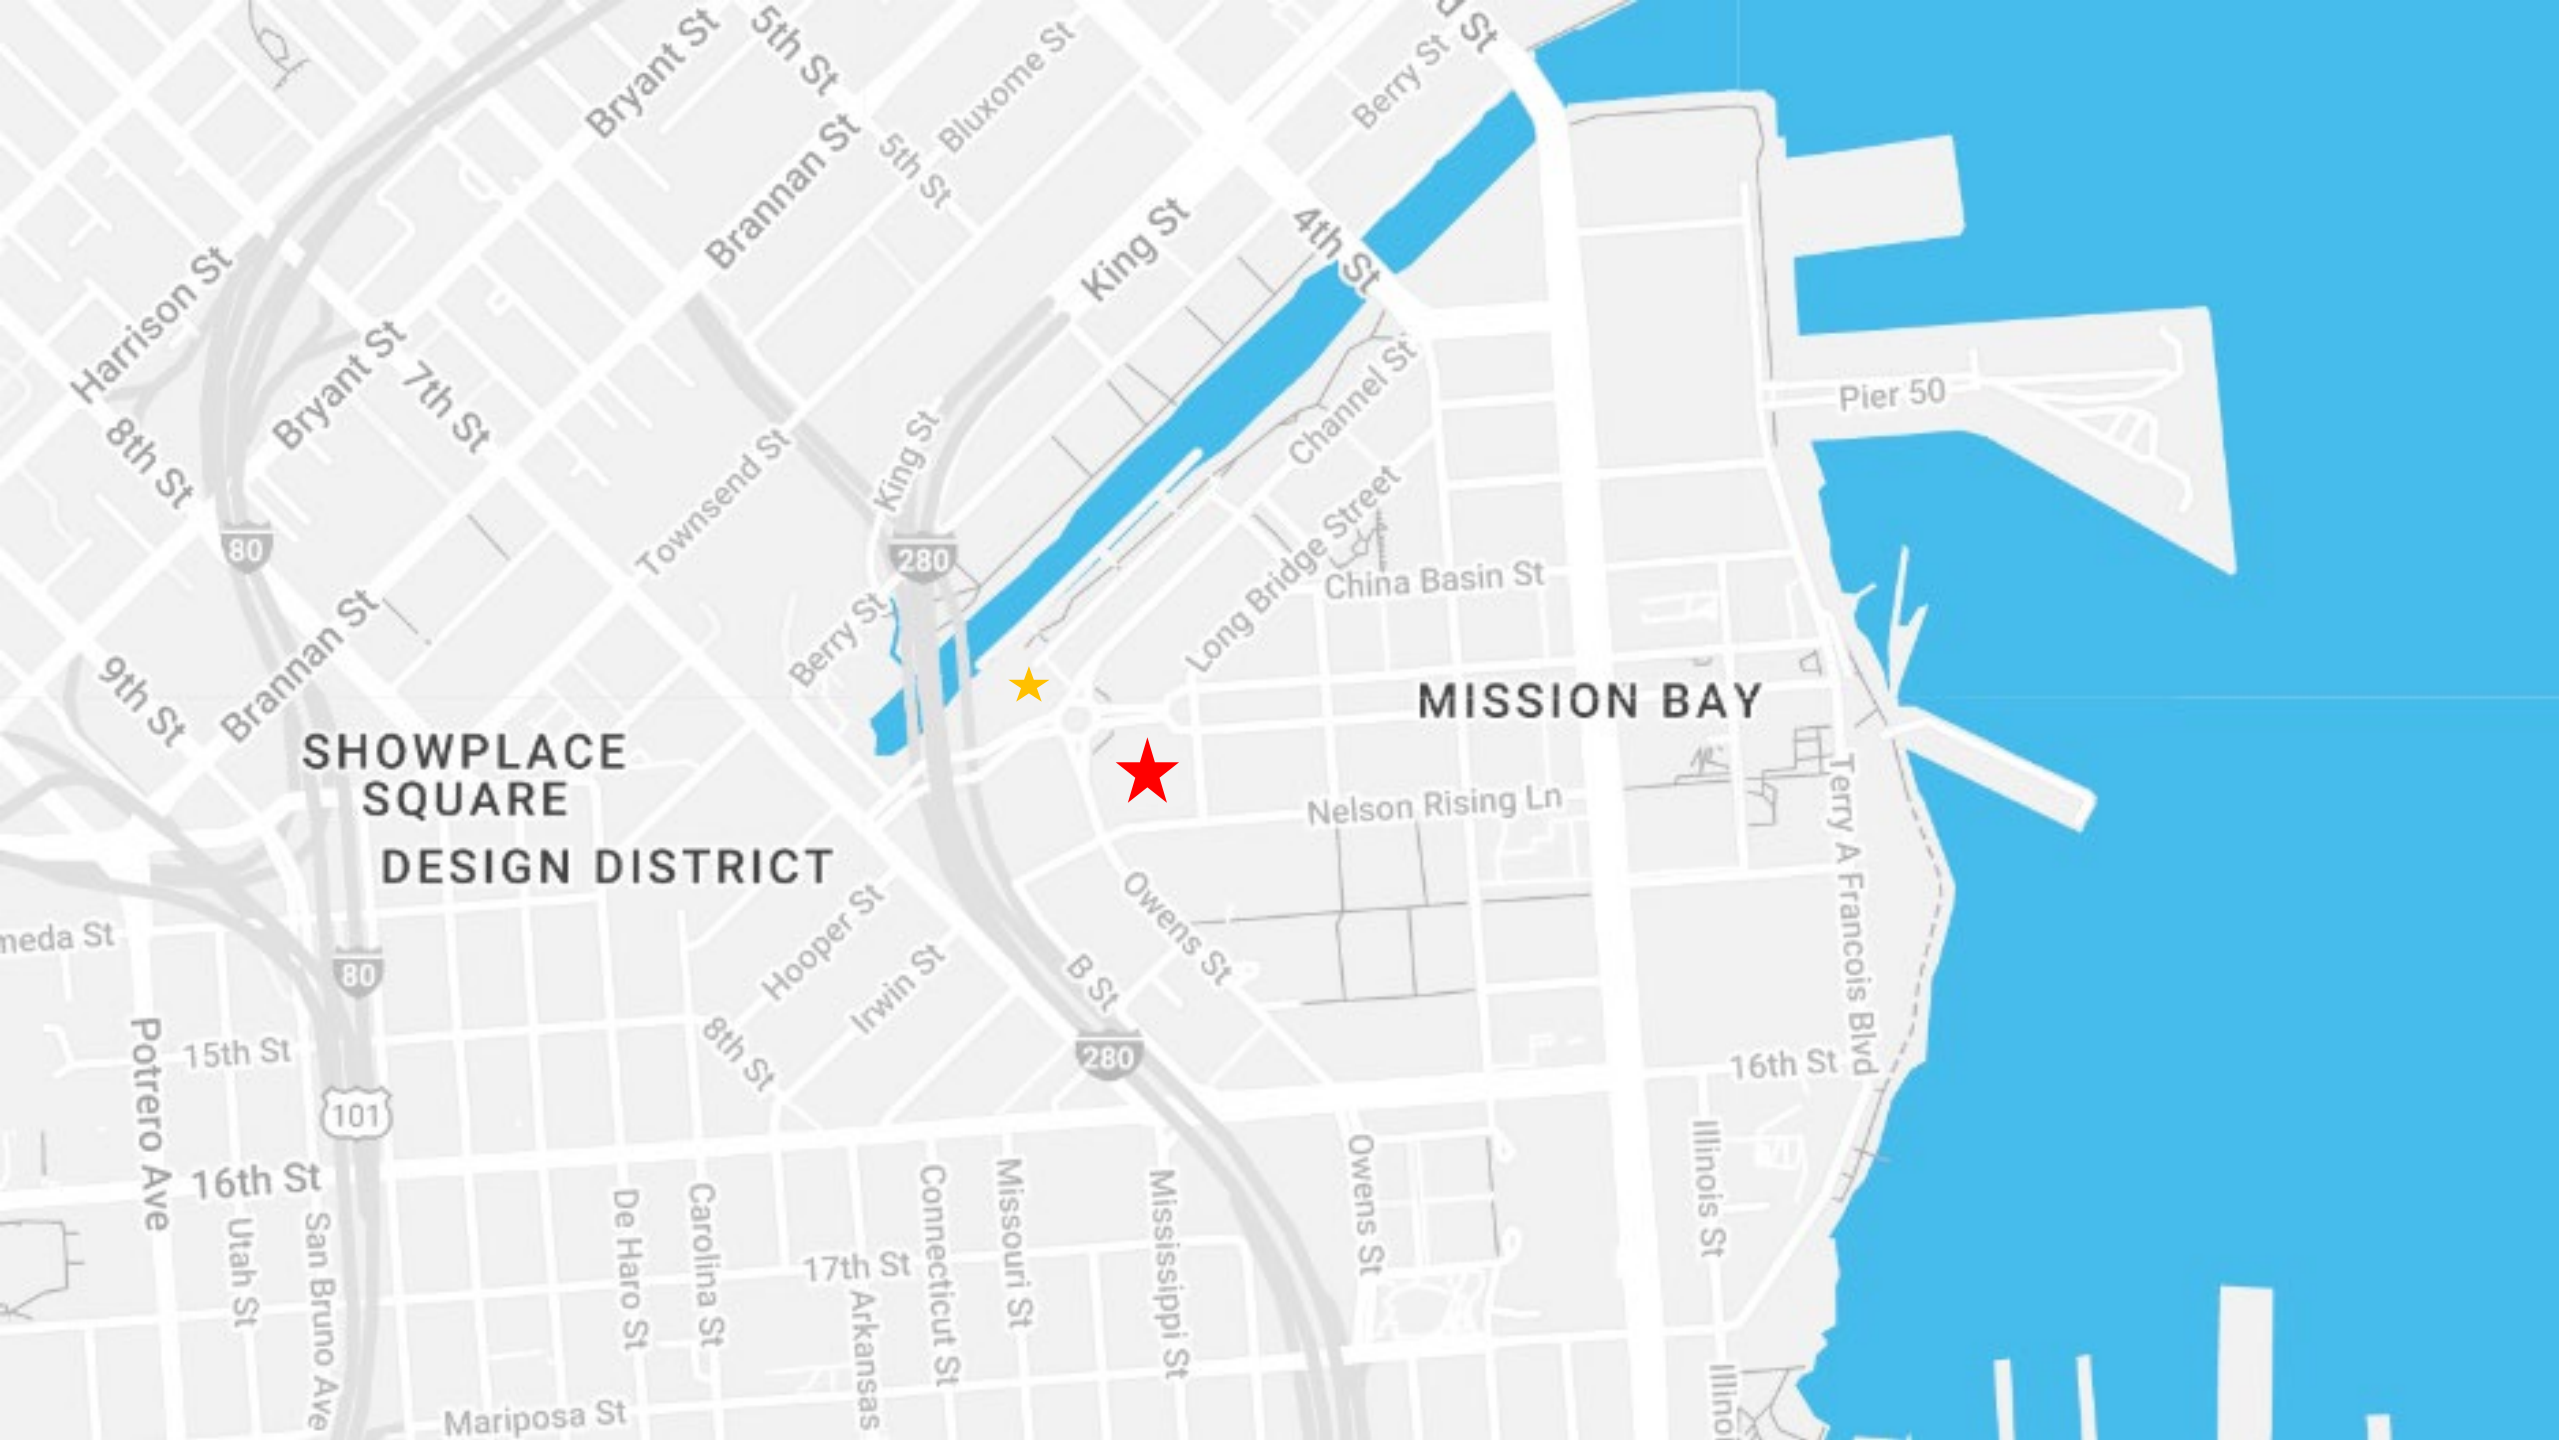

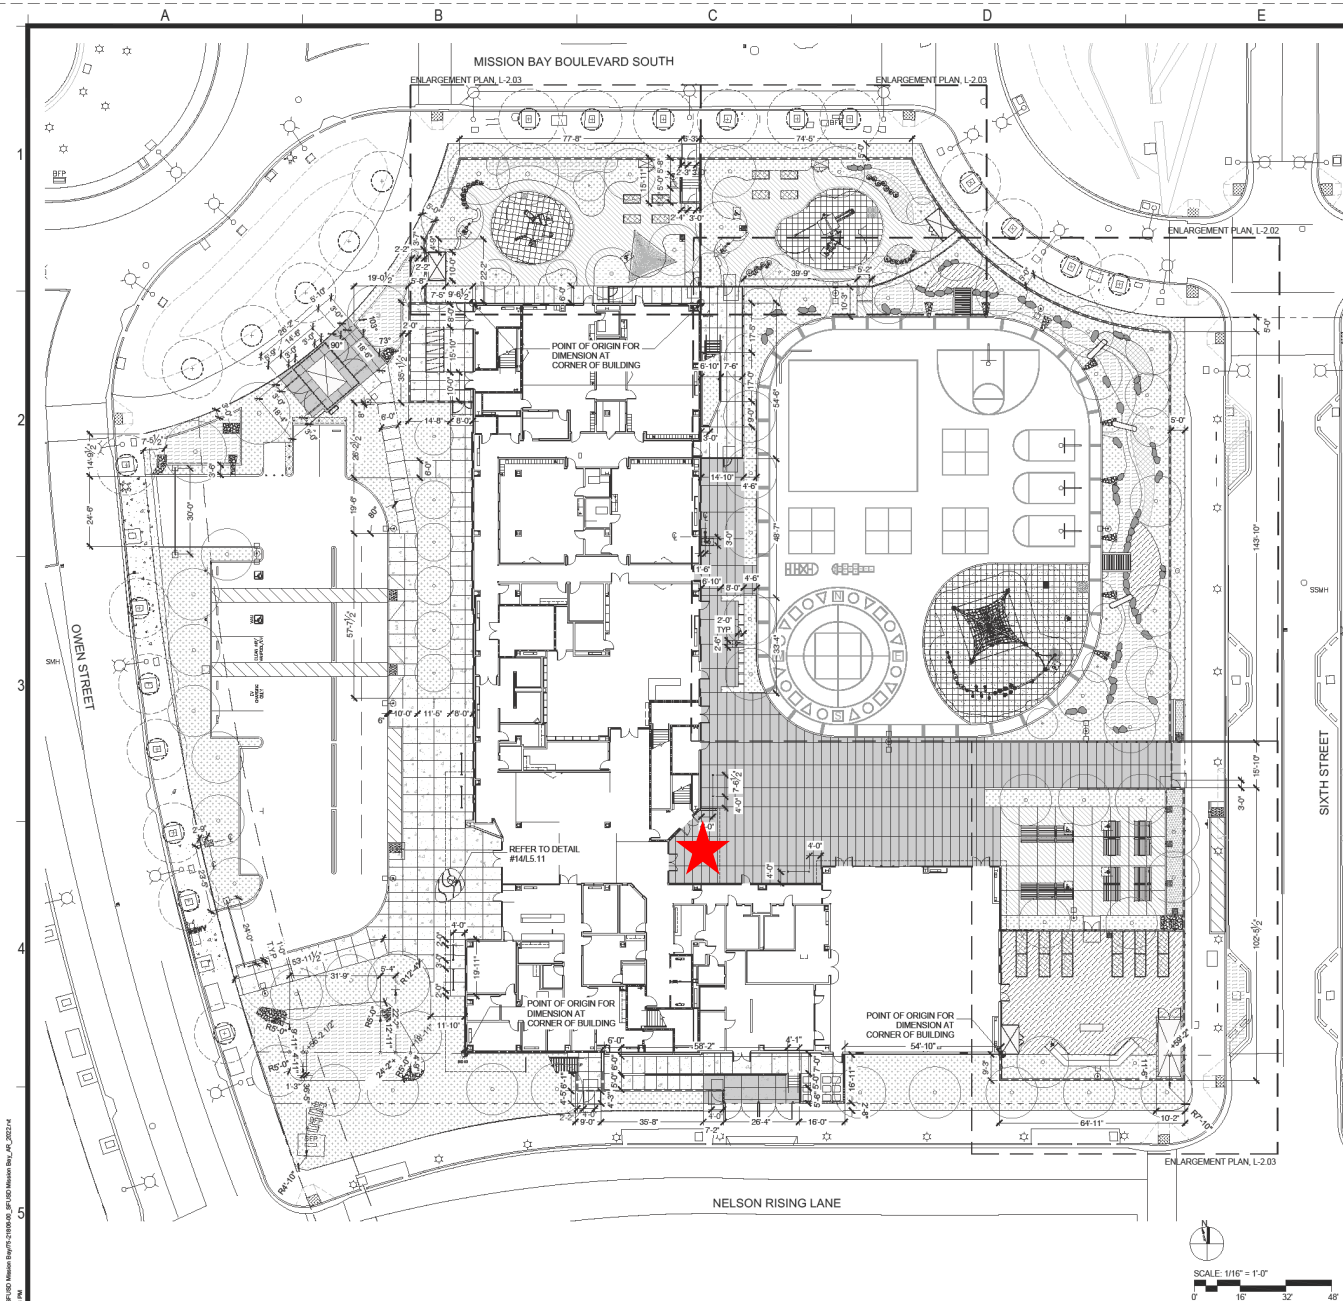

Approvals



SFUSD SAN FRANCISCO
PUBLIC SCHOOLS

2016 PROPOSITION A BOND PROGRAM

135 Van Ness Avenue
San Francisco, California 94102
Tel (415) 241-0152
Fax (415) 241-0148

Architect

	Engineer
--	----------



Firm Name and Address and Logo

DLR GROUP

© DLR Group



McCarthy

Consultant

MILLER COMPANY
landscape architects
1585 POLSON ST. SAN FRANCISCO, CA 94103
415.252.7288 www.millercomp.com

Project Name and Address

SFUSD
Mission Bay School

Mission Bay Block #14
Owens Street
San Francisco, CA 94158

DSA APPROVAL

[illegible]

DRAWING TITLE

LANDSCAPE LAYOUT
PLAN

SHEET NO.

L2.01

JOB NO.	
---------	--

75-21806-00

01-120822

01-120822
DSA FILE

38-1

BY	SITE NO.:
----	-----------

DATE:	DRAFTER	CHECKED BY	SITE NO.:
05.10.2024	UP	2024	

01-10-2024	JZ	MN	
------------	----	----	--

SCALE: AS NOTED	S.F.U.S.D. PROJECT NO. 11889
--------------------	---------------------------------

AS NOTED	11869
----------	-------







MISSION BAY SCHOOL



MISSION BAY SCHOOL



SCHOOL

LOBBY
BUILDING
ENTRANCE

STAIR 3
LOCKER






BUILDING
ENTRANCE


STAIR 3
10053












RET04 ▶ Empress White UPS/PO

Sizes (Shown in RET13)

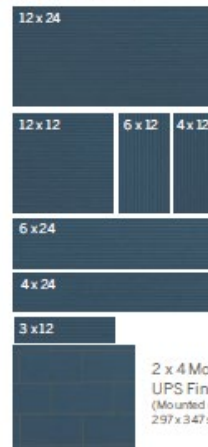

2 x 4 Mosaics
UPS Finish
(Mounted on an
297 x 347 sheet.)

Sizes & Finishes

Field Tile		Available in all colors	
Nominal (in)	Actual (in)	Thickness (in)	Finish
3 x 12*	2-3/4 x 11-3/4	5/16	UPS/PO/PTN
4 x 12*	3-3/4 x 11-3/4	5/16	UPS/PO/PTN
4 x 24*	3-3/4 x 23-3/4	5/16	UPS/PO/PTN
6 x 12*	5-3/4 x 11-3/4	5/16	UPS/PO/PTN
6 x 24*	5-3/4 x 23-3/4	5/16	UPS/PO/PTN
12 x 12	11-3/4 x 11-3/4	5/16	UPS/PO/PTN
12 x 24	11-3/4 x 23-3/4	5/16	UPS/PO/PTN

Crossville recommends a grout joint of 3/16 inch.
Actual measurements stated in inches indicate tile is calibrated (non-rectified).
Actual measurements stated in mm indicate tile is rectified.
*These sizes are not a standard stocking item. Please allow 3-4 weeks for delivery depending on availability.
No set-up fee or handling charge applied.

Mosaics		Available in all colors	
Nominal (in)	Actual (in)	Thickness (in)	Finish
2 x 4 Mosaic	11-3/4 x 11-3/4	5/16	UPS

*Mesh mounted on 297 x 347 sheet with 3mm grout joint. Coverage area is 0.97sf.

Coordinating Trim		Available in all colors	
Nominal (mm)	Actual (in)	Thickness (in)	Finish
4 x 12 Single Bullnose	3-3/4 x 11-3/4	5/16	UPS/PO/PTN
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	UPS
2 x 12 Cove Base	1-3/4 x 11-11/16	3/8	UPS
1 x 6 Inside Corner	1 x 5-7/8	NA	UPS
2 x 2 Inside Corner	1-3/4 x 1-3/4	NA	UPS
1 x 6 Outside Corner	1 x 5-7/8	NA	UPS
2 x 4 Outside Corner	1-3/4 x 3-1/2	NA	UPS



Product Performance

Breaking Strength	>350 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance (UPS, PTN)	Class A	ASTM C650
Chemical Resistance (PO)	Class B	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.20%	ASTM C373
Scratch Hardness	7	Mohs Scale

Wet Dynamic Coefficient of Friction Range

UPS	0.50 - 0.60	AcuTest SM
PO	0.31 - 0.41	AcuTest SM
PTN	0.42 - 0.52	AcuTest SM

Shade & Texture Index

Retro Active 2.0 has a shade variation of V1.



This porcelain tile product is produced with a V1 variation. Differences among pieces from the same production run are minimal. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.

WINSOR FIREFORM
PORCELAIN ENAMEL

FIREFORM
GRAPHIC TILE

FIREFORM
FABRICATION

PORCELAIN ENAMEL TILE CARE INSTRUCTIONS

Winsor Fireform porcelain enamel tiles require little maintenance. For the most part, maintenance consists of periodic cleaning. Following the simple steps outlined below will help to ensure the long-lasting beauty of your Winsor Fireform porcelain enamel tile.

- 1) Clean the area with a clean, soft cloth and Windex or soap and water. Vigorous rubbing may sometimes be required for particularly difficult stains.
- 2) Graffiti can readily be removed with paint thinner or a solvent that will dissolve the offending material. Any residual haze can be cleaned as outlined in Step 1.

DO NOT use sandpaper, steel wool, Comet cleaner, Scotchbrite, Brillo pads, sandblasters, or any other abrasive pad or cleaner – part of porcelain enamel's charm is its clean-ability; using Windex, alcohol, or a strong solvent should clean any stain from the enamel.

If you need additional information, contact us at 1-800-824-7506.


Exhibit Excellence

Exhibit Quality

Exhibit Strength





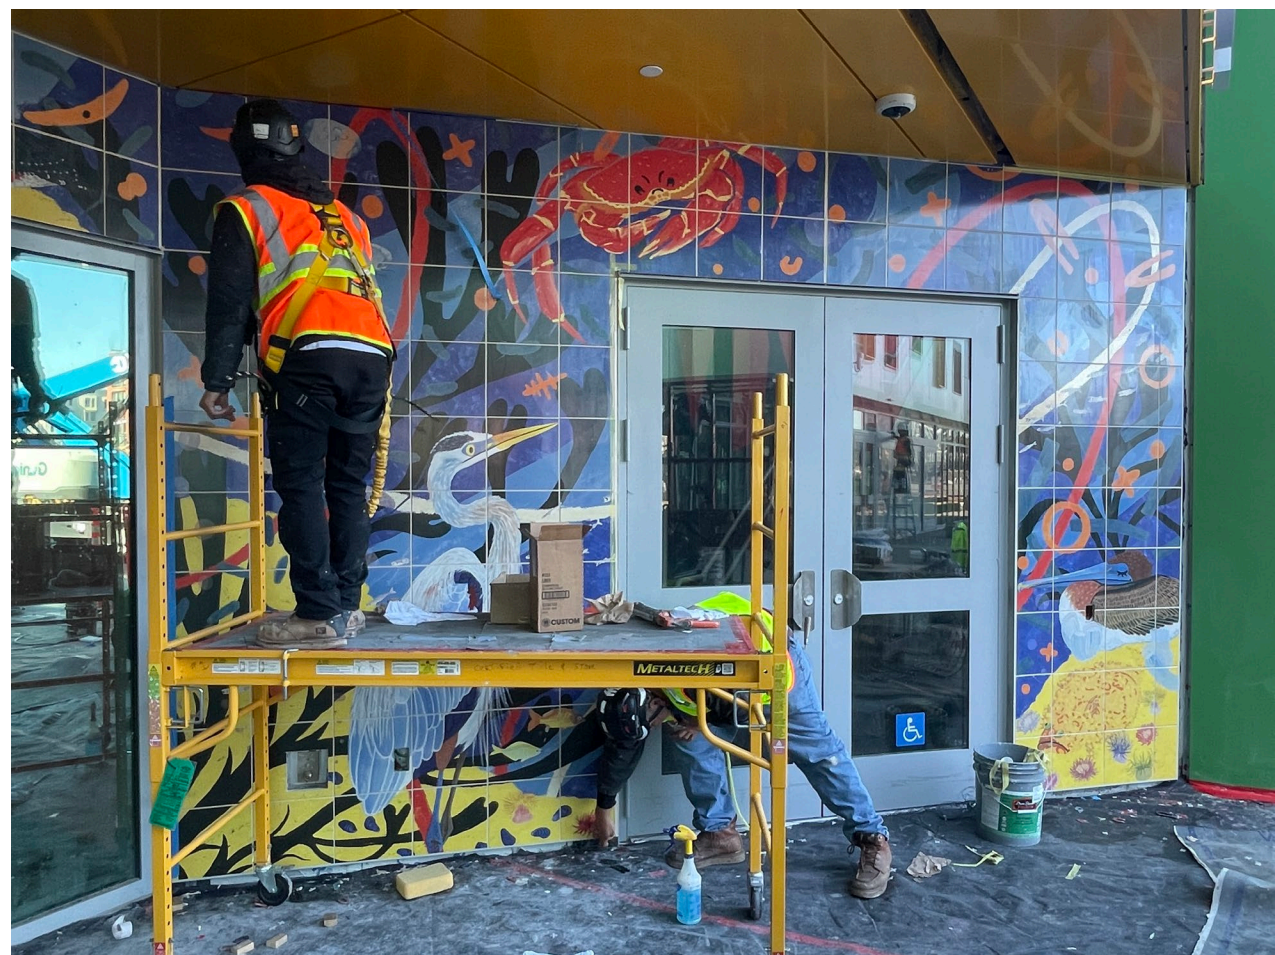





MISSION BAY SCHOOL